

AVN362


1.3 Megapixel Outdoor IR Network Camera



FEATURES

- Remote Surveillance
 - Mobile surveillance via our self-developed and free program, "EagleEyes", is supported on many popular mobile platforms, such as iPhone, BlackBerry, Windows Mobile & Symbian.
 - Network surveillance via the licensed software "Video Viewer", Internet Explorer, Mozilla Firefox or Google Chrome web browser, and QuickTime player is supported with up to 10 users' login simultaneously.
- Intelligent Video Surveillance
 - **Virtual Fence**
A virtual intruder detection line is set to detect intruders crossing the detection line.
 - **Flow Counting**
A virtual detection line is set to detect the moving direction of pedestrians for flow counting.
 - **Face Tracking**
zoom in on intruders with clear images.
- Digital Smart Zoom: zoom in on the object that triggered the alarm
- Smart Light Control to avoid overexposure
- The best cost / performance outdoor solution with IP67
- Excellent outdoor ID design with cable management
- Low-latency video streaming with H.264 compression format
- Free CMS software with E-Map for multiple devices control & surveillance
- Motion detection and event notifications

Dimensions

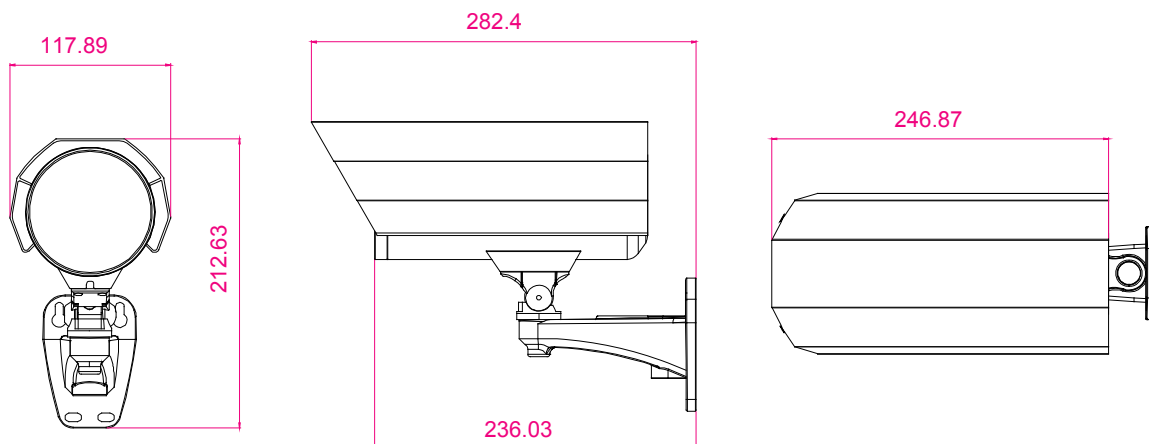

SPECIFICATIONS

AVN362

■ Network	
Network Compression	H.264 / MPEG4 / MJPEG
LAN Port	YES
LAN Speed	10/100 Based-T Ethernet
Supported Protocols	DDNS, PPPoE, DHCP, NTP, SNTP, TCP/IP, ICMP, SMTP, FTP, HTTP, RTP, RTSP
Video Resolution	SXGA, SXVGA, 720P, VGA, QVGA
Frame Rate	NTSC: 30, PAL: 25
Number of Online Users	10
Security	Multiple user access levels with password protection
Web management	(1) Web browsers, such as Internet Explorer, Mozilla FireFox or Google Chrome for single device access, or (2) Free CMS software, Video Viewer, for up to 16 network cameras control simultaneously
■ Camera	
Image Sensor	1/3" MOS-Type Image Sensor
Pixels	1280 (H) x 1024 (V)
Min Illumination	0 Lux (11m IR ON) / 0.2 Lux (IR OFF)
Shutter Speed	At 60 fps: 1/60s to 1/60000s
S/N Ratio	More than 48dB (AGC off)
Lens	f6.0mm
F-number	F1.8
Viewing Angle	62°
IR LED	56 units
IR Effective Range	Up to 25 meters
IR Shift	YES
White Balance	ATW
IP Rating	IP67
Power Source (±10%)	DC12V / 1.5A
Current Consumption (±10%)	1000 mA
Operating Temperature	-20°C ~ 40°C
■ Others	
Mobile Surveillance	iPhone, BlackBerry, Window Mobile & Symbian
Motion Detection	YES
Smart Light Control	YES
Digital Smart Zoom	YES
Digital Pan / Tilt / Zoom	YES
Virtual Fence	YES
Flow Counting	YES
Face Tracking	YES
Alarm and event Notification	FTP / Email
Minimum Web Browsing Requirements	<ul style="list-style-type: none"> • Pentium 4 CPU 1.3 GHz or higher, or equivalent AMD • 256 MB RAM • AGP graphics card, Direct Draw, 32MB RAM • Windows Vista, XP, Windows 2000 Server, ME, 98, DirectX 9.0 or later • Internet Explorer 6.x or later

* The specifications are subject to change without notice.

** Dimensional tolerance: (± 5mm)